



Tanker Applicators

Optional Extras:

- 3-point linkage
- Different screen sizes to increase or decrease the flow rate
- Can be supplied with Skate Board for JD Harvest Lab
- Smart Spread Flow meter compatible with 10' Tablet or ISOBUS



Spreading **Sustainability**
REDUCING EMISSIONS

Mastek Flexi Trailing Shoe

Designed to address the concerns of farmers who have been struggling with the limitations of traditional trailing shoe applicators, the Flexi Trailing Shoe offers a lightweight, low-emission solution that is perfect for hilly or uneven fields. Can be door or chassis mounted

Features:

- Parts the grass and places the slurry directly onto the soil.
- Has a Rubber Boot and Coulter which splits the grass
- Fits any tanker
- Integrated Mastek Supercut Macerator
- Upgraded knife Hydraulic gate valve
- Equipped with a heavy lay flat hose
- Hydraulic folding mechanism
- Spring-loaded hinged arms
- Bolt-on retrofit – no welding required
- Lightweight and durable, 100% galvanized
- Easy access stone trap
- LED Lights



Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie



www.mastek.ie

Product Specifications


Working Width	Transport Height	Closed Width	No. of Outlets	Weight	Depth
7.6m	3.5m	2.7m	28	480kg	1m
8m	3.5m	2.7m	30	505kg	1m
8m (2-stage fold)	2.8m	2.7m	30	525kg	1m
9.2m (2-stage fold)	2.8m	2.7m	34	555kg	1m

Mastek Super Cut Macerator

All Mastek products are fitted with Mastek Super Cut Macerator. It will macerate and distribute evenly with our 48 outlet macerator, even on the most hilly conditions. This is achieved by our air breather one-way valves, which are uniquely placed above every outlet pipe. This valve sucks in the air as the serrated knife-cutters pass by each outlet, allowing the slurry to flow without resistance or air-locking. This system gives a $\pm 98\%$ accurate distribution. Each sideplate screen can be supplied with various hole sizes to increase and decrease the slurry flow.

Features:

- Capable of cutting high-fibre slurry
- Even outlet distribution
- 2.5m of long-life combined cutter blades edge
- Individual air breathers for each outlet pipe
- Available in 40mm & 45mm tube with 28,30, 40 or 48 outlets
- Low maintenance
- Easy access door
- Hydraulic motor protection

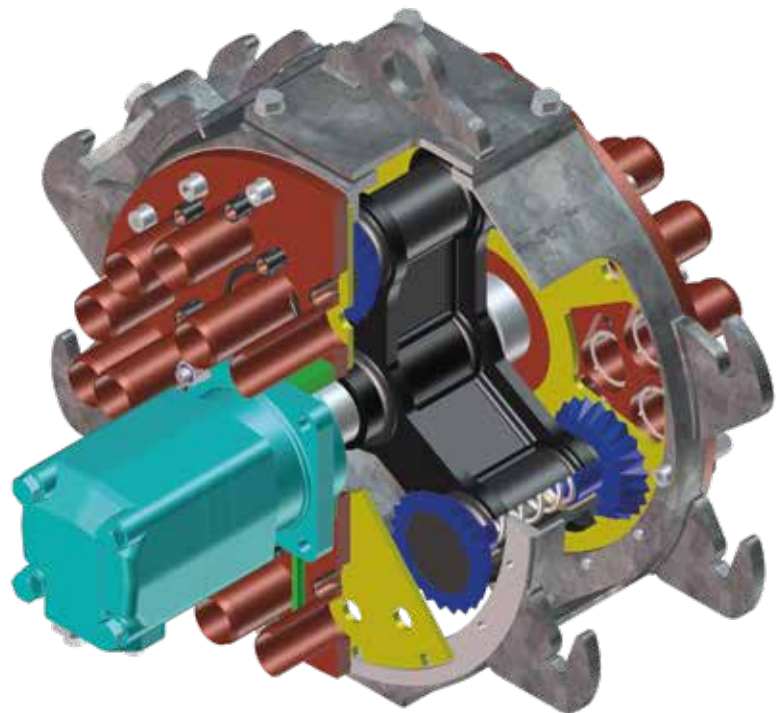

Spreading **Sustainability**
REDUCING EMISSIONS



www.mastek.ie

Mastek Ltd Ireland
Cootehill Business Park
Cootehill
Co. Cavan
H16 DX45, Ireland
Tel: +353 (0) 49 555 5953
Email: enquiries@mastek.ie

Mastek Ltd UK
Alderton Farm
Harmer Hill, Shrewsbury
Shropshire
SY4 3EL United Kingdom
Tel: + 01939 220079
Email: uksales@mastek.ie